



Graphictrax®

STEPS BEYOND THE ORDINARY

promote your brand or personal style with

ENDLESS POSSIBILITIES

Thousands of images, patterns, colors, and styles or use any custom image.



Visit graphicimageflooring.com or Call 866-406-8877

Colors shown on this sheet are as accurate as printing will allow. Images not to scale.





Graphictrax®

DESCRIPTION

ENDLESS POSSIBILITIES. Choose from thousands of images, patterns, colors, or provide your own for a custom tile made to withstand the demands of both residential and commercial environments. It's never been easier to personalize your style, or promote your brand.

BENEFITS


-  **SUPERIOR STRENGTH**
3/4" thick and features a compressive strength of 1,250 psi or 25,000 lbs of rollover weight.
-  **DO IT YOURSELF**
Apply "peel and stick" logo directly to the interlocking bases. Finished logo assemblies directly into your flooring.
-  **SILENT STEP**
No click-clack.
-  **CHEMICAL RESISTANT**
Resistant to oil, gas, acid or solvents including Skydrol and Alkalies.
-  **CONSTRUCTION**
Patented base design with 1/4" built in support system that also maximizes airflow. Closed profile "peel and stick" custom graphic inlay can easily be replaced or rebranded.
-  **VARIETY**
No size limitation, from one tile to one hundred. Interlock with other 15.75" Swisstrax tiles for a completely branded or full graphic look.



VIDEO LINK

[CLICK HERE TO LEARN MORE - \(https://youtu.be/kwTG8tCkRfk\)](https://youtu.be/kwTG8tCkRfk)

COLORS

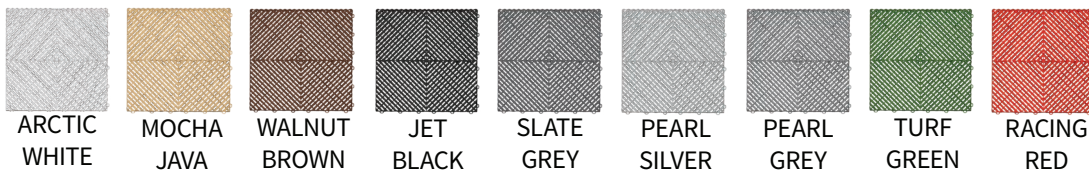

*Color variation only available for single **Graphictrax®**.

*If your **Graphictrax®** is larger than one single tile, black **Basetrax®** will be provided as the standard base option.



Graphic
Image Flooring

STEPS BEYOND THE ORDINARY

Visit graphicimageflooring.com or Call 866-406-8877


Colors shown on this sheet are as accurate as printing will allow. Images not to scale.





Graphictrax®

DIMENSIONS

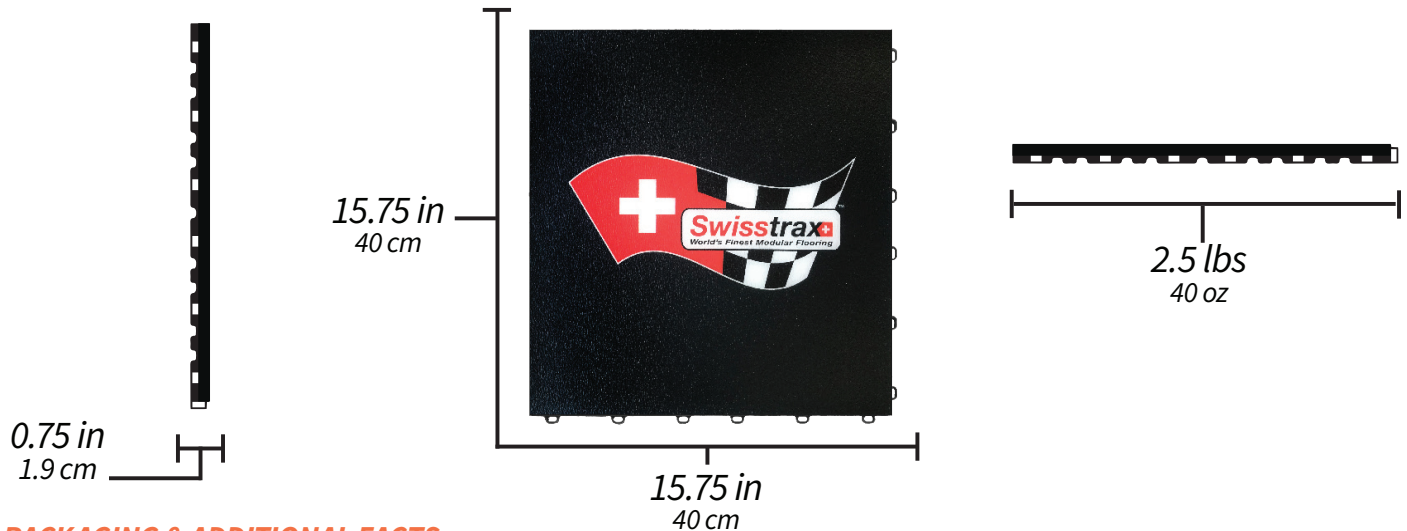

PACKAGING & ADDITIONAL FACTS

PACKAGING:	17 TILES (29.24 SQFT) PER BOX	CLEANING:	MOP WITH MILD CLEANSER
WEAR LAYER:	0.5MM	FIRE RATING:	HORIZONTAL BURN RATING
VINYL THICKNESS:	3 MM	TOOLS:	NO EXTRA TOOLS REQUIRED
CABLE ROUTING:	UPGRADE AVAILABLE	MATERIAL:	100% UV STABILIZED
CUTTING:	FINE TOOTH BLADE		POLYPROPYLENE
WARRANTY:	15 YEARS	LOGO:	PRINTED VINYL

TRANSITION & EDGE OPTIONS & COLORS



Graphic
Image Flooring
STEPS BEYOND THE ORDINARY

Visit graphicimageflooring.com or Call 866-406-8877

Colors shown on this sheet are as accurate as printing will allow. Images not to scale.

